



MagFlexMat installation base solution - metal mat

UNCOUPLING

Magnetic Self-Laying Dry Removable System



1 Deteriorated and cracked ceramic floor

2 Double-sided adhesive strip
MagTaping

3 **MagFlexMat / Metal mat**

1. As an UNCOUPLING membrane

- For laying on cracked, not perfectly cured cementitious substrates and for cracked ceramics as long as they are stable.
- For laying tiles on screeds without respecting existing dividing joints.

2. As a REMOVABLE SYSTEM

- For the DRY SELF-LAYER for tiles or other magnetic support.

4 PVC tape
Self-extinguishing waterproofer.

5 Floor made of ceramic or other material as long as magnetic, MagFace patent MagFlexMag carpet installed on the back.

6 MagBanding - Expanded Rubber - Edging Removable, self-adhesive, self-extinguishing, flexible, flame retardant, stain resistant and last but not least, creates a cushioning cushion on the perimeter of the ceramic while also protecting it during handling and / or repositioning.


Note:

- If the floors, surfaces, screeds are very damaged, they must be repaired with suitable and leveled products.
- Gap and edging option: The MagFace system does not have the obligation to follow the grout, if desired, the patented system offers a line for any intended use. Consult the manual or Technical Assistance.
- Perimeter sealing option. Consult the manual or Technical Assistance

WARNING The above information and prescriptions, while corresponding to our best experience, are to be considered, in any case, purely indicative and must be confirmed by exhaustive practical applications; therefore, before using the product, whoever intends to use it is required to establish if it is suitable or not for the intended use and, in any case, assumes all responsibility that may derive from its use. Always refer to the latest updated version of the manual, technical data sheets, available on the website www.magface.it or request them by writing fofo@magface.it
Tutorials available on YouTube MagFace® by Bassi Group Int
Stay updated FB IG YouTube LI [magfaceofficial](https://www.magfaceofficial.com)

Magnetic Self-Laying Dry Removable System

SUBSTRATES	ALL
MATERIALS	ALL
FORMATS	ALL
THICKNESSES	ALL
DESIGN OF LAYING	ALL

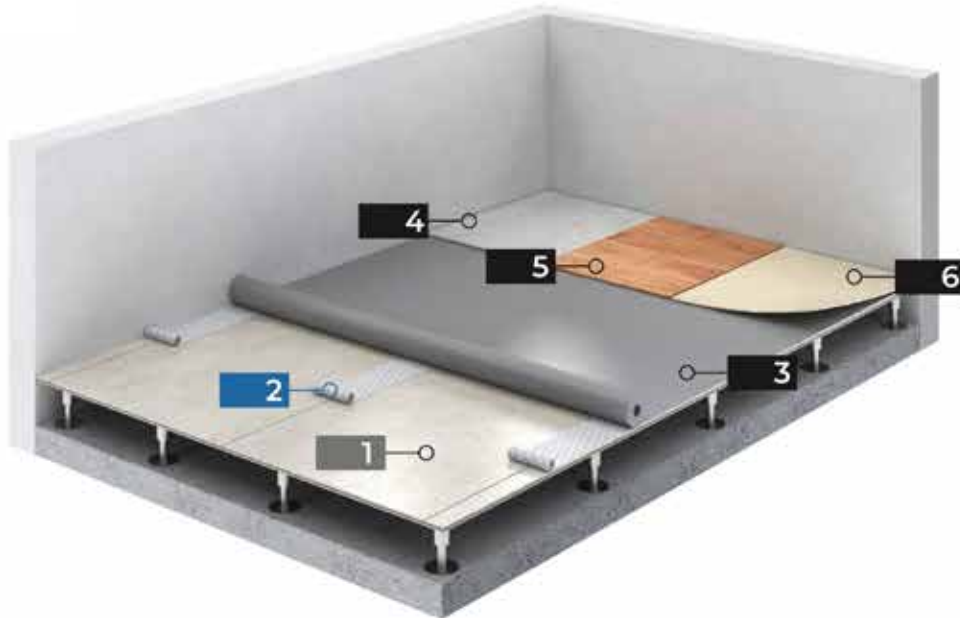

1 Raised module in mdf, pre-existing material except iron and galvanized sheet

2 Double-sided adhesive strip
MagTaping

3 MagFlexMat - metal mat

4 Raised access floor in magnetic ceramic of any size with reuse of the module thanks to the patent that does not require gluing the tile.

5 Raised access floor in magnetic wood of any size with reuse of the module thanks to the patent that does not require the gluing of the wood.

6 Laminate raised access floor, magnetic LVT of any size with reuse of the module thanks to the patent that does not require gluing the laminate, LVT.

Note:

- If the floors, surfaces, screeds are very damaged, they must be repaired with suitable and leveled products.
- Gap and edging option: The MagFace system does not have the obligation to follow the grout, if desired, the patented system offers a line for any intended use. Consult the manual or Technical Assistance.
- Perimeter sealing option. Consult the manual or Technical Assistance

WARNING The above information and prescriptions, while corresponding to our best experience, are to be considered, in any case, purely indicative and must be confirmed by exhaustive practical applications; therefore, before using the product, whoever intends to use it is required to establish if it is suitable or not for the intended use and, in any case, assumes all responsibility that may derive from its use. Always refer to the latest updated version of the manual, technical data sheets, available on the website www.magface.it or request them by writing to info@magface.it

Tutorials available on YouTube MagFace® by Bassi Group Int

Stay updated FB IG YouTube LI [magfaceofficial](https://www.magfaceofficial.com)

Copyright 2024 Bassi Group International


MagFace®

Solution with **MagMixturePlaster** installation base - water-based putty
FLOORS | WALLS | RAISED | FURNISHINGS

LEVELED

Magnetic Self-Laying Dry Removable System

SUBSTRATES	ALL
MATERIALS	ALL
FORMATS	LIMITATIONS
THICKNESSES	LIMITATIONS
DESIGN OF LAYING	ALL

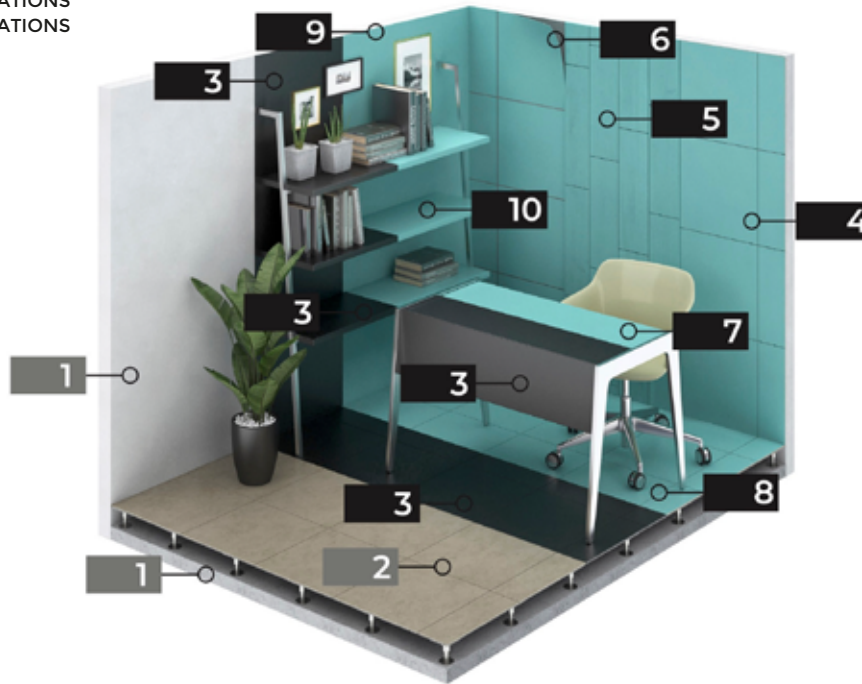

1 Substrate in concrete, gypsum fiber, plaster, plasterboard, mdf, calcium sulphate, LVT, PVC, wood, steel, resin, cork, with underfloor heating, pre-existing

2 Raised module

3 MagMixturePlaster - water putty.

4 Wall made with MAGNETIC CERAMIC MagFace patent - limited sizes

5 Wall made with PARQUET and / or MAGNETIC wood MagFace patent - limited sizes

6 Wall made with magnetic LVT, MagFace patent - limited sizes

7 Desk top made with MAGNETIC CERAMIC MagFace patent

8 Floor made with MAGNETIC CERAMIC MagFace patent

9 Wall made with MAGNETIC WALLPAPER printed from catalog or made to measure on magnetic film.

10 Shelf made with MAGNETIC CERAMIC MagFace patent

Note:

- If the floors, surfaces, screeds are very damaged, they must be repaired with suitable and leveled products.
- Gap and edging option: The MagFace system does not have the obligation to follow the grout, if desired, the patented system offers a line for any intended use. Consult the manual or Technical Assistance.
- Perimeter sealing option. Consult the manual or Technical Assistance

WARNING The above information and prescriptions, while corresponding to our best experience, are to be considered, in any case, purely indicative and must be confirmed by exhaustive practical applications; therefore, before using the product, whoever intends to use it is required to establish if it is suitable or not for the intended use and, in any case, assumes all responsibility that may derive from its use. Always refer to the latest updated version of the manual, technical data sheets, available on the website www.magface.it or request them by writing to info@magface.it

Tutorials available on YouTube MagFace® by Bassi Group Int

Stay updated FB IG YouTube LI [magfaceofficial](https://www.magfaceofficial.com)

Copyright 2024 Bassi Group International




Solution with with **MagMixturePaint** installation base - water-based paint
FLOORS | WALLS | RAISED | FURNISHINGS

LEVELED

Magnetic Self-Laying Dry Removable System

SUBSTRATES	ALL
MATERIALS	ALL
FORMATS	LIMITATIONS
THICKNESSES	LIMITATIONS
DESIGN OF LAYING	ALL

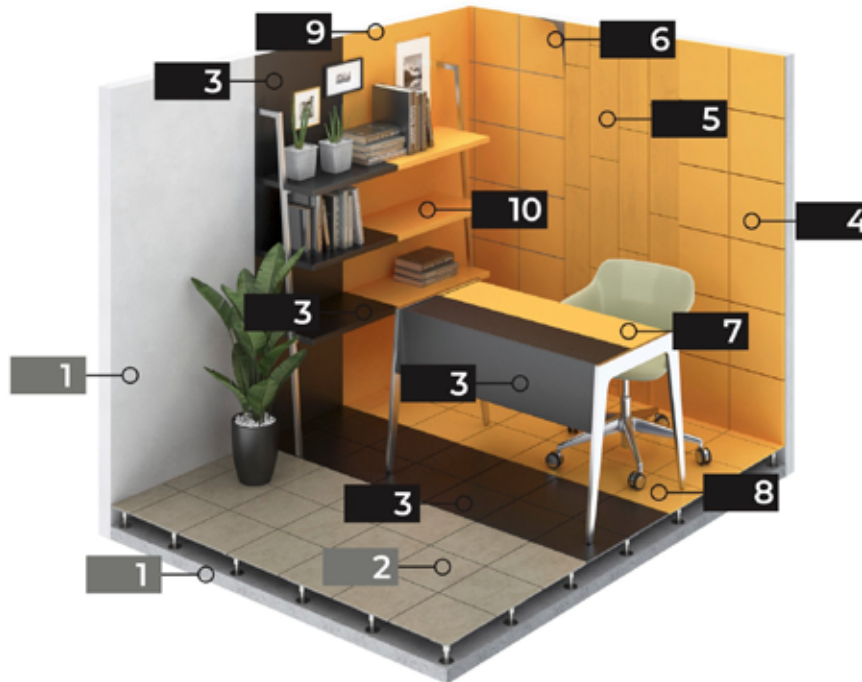

1 Substrate in concrete, gypsum fiber, plaster, plasterboard, mdf, calcium sulphate, LVT, PVC, wood, steel, resin, cork, with underfloor heating, pre-existing

2 Raised module

3 MagMixturePaint - water paint.

4 Wall made with MAGNETIC CERAMIC MagFace patent - limited sizes

5 Wall made with PARQUET and / or MAGNETIC wood MagFace patent - limited sizes

6 Wall made with magnetic LVT, MagFace patent - limited sizes

7 Desk top made with MAGNETIC CERAMIC MagFace patent

8 Floor made with MAGNETIC CERAMIC MagFace patent

9 Wall made with MAGNETIC WALLPAPER

10 Shelf made with MAGNETIC CERAMIC MagFace patent

Note:

- If the floors, surfaces, screeds are very damaged, they must be repaired with suitable and leveled products.
- Gap and edging option: The MagFace system does not have the obligation to follow the grout, if desired, the patented system offers a line for any intended use. Consult the manual or Technical Assistance.
- Perimeter sealing option. Consult the manual or Technical Assistance

WARNING The above information and prescriptions, while corresponding to our best experience, are to be considered, in any case, purely indicative and must be confirmed by exhaustive practical applications; therefore, before using the product, whoever intends to use it is required to establish if it is suitable or not for the intended use and, in any case, assumes all responsibility that may derive from its use. Always refer to the latest updated version of the manual, technical data sheets, available on the website www.magface.it or request them by writing to info@magface.it

Tutorials available on YouTube MagFace® by Bassi Group Int
Stay updated FB IG YouTube LI magfaceofficial



Solution with MagFlexMat installation base - metal mat

LEVELED WALL

Magnetic Self-Laying Dry Removable System

SUBSTRATES	ALL
MATERIALS	ALL
FORMATS	ALL
THICKNESSES	ALL
DESIGN OF LAYING	ALL



1 Substrate in concrete, gypsum fiber, plaster, plasterboard, mdf, calcium sulphate, LVT, PVC, wood, steel, resin, cork, with underfloor heating, pre-existing.

2 Double-sided adhesive strip
MagTaping

3 MagFlexMat - metal mat

4 PVC tape
Self-extinguishing waterproofer

5 Wall made with MAGNETIC CERAMIC
MagFace patent

6 Wall made with MAGNETIC PARQUET
MagFace patent

7 Wall made with LAMINATE or magnetic
LVT, MagFace patent

Note:

- If the floors, surfaces, screeds are very damaged, they must be repaired with suitable and leveled products.
- Gap and edging option: The MagFace system does not have the obligation to follow the grout, if desired, the patented system offers a line for any intended use. Consult the manual or Technical Assistance.
- Perimeter sealing option. Consult the manual or Technical Assistance

WARNING The above information and prescriptions, while corresponding to our best experience, are to be considered, in any case, purely indicative and must be confirmed by exhaustive practical applications; therefore, before using the product, whoever intends to use it is required to establish if it is suitable or not for the intended use and, in any case, assumes all responsibility that may derive from its use. Always refer to the latest updated version of the manual, technical data sheets, available on the website www.magface.it or request them by writing to info@magface.it

Tutorials available on YouTube MagFace® by Bassi Group Int

Stay updated FB IG YouTube LI [magfaceofficial](https://www.magfaceofficial.com)

Copyright 2024 Bassi Group International



Solution with **MagFlexMat** installation base - metal mat

LEVELED FLOOR

Magnetic Self-Laying Dry Removable System

SUBSTRATES	ALL
MATERIALS	ALL
FORMATS	ALL
THICKNESSES	ALL
DESIGN OF LAYING	ALL



1 Substrate in concrete, gypsum fiber, plaster, plasterboard, mdf, calcium sulphate, LVT, PVC, wood, steel, resin, cork, with underfloor heating, pre-existing.

2 Double-sided adhesive strip
MagTaping

3 MagFlexMat - metal mat

4 PVC tape
Self-extinguishing waterproofer

5 Floor made with **MAGNETIC CERAMIC**
MagFace patent

6 Floor made with **MAGNETIC PARQUET**
MagFace patent

7 Floor made with **LAMINATE** or magnetic
LVT, MagFace patent

Note:

- If the floors, surfaces, screeds are very damaged, they must be repaired with suitable and leveled products.
- Gap and edging option: The MagFace system does not have the obligation to follow the grout, if desired, the patented system offers a line for any intended use. Consult the manual or Technical Assistance.
- Perimeter sealing option. Consult the manual or Technical Assistance

WARNING The above information and prescriptions, while corresponding to our best experience, are to be considered, in any case, purely indicative and must be confirmed by exhaustive practical applications; therefore, before using the product, whoever intends to use it is required to establish if it is suitable or not for the intended use and, in any case, assumes all responsibility that may derive from its use. Always refer to the latest updated version of the manual, technical data sheets, available on the website www.magface.it or request them by writing to info@magface.it

Tutorials available on YouTube MagFace® by Bassi Group Int
Stay updated FB IG YouTube LI [magfaceofficial](https://www.magfaceofficial.com)


MagFace®

Solution with **MagFlexMat** installation base - metal mat

FLOOR - WALL WITH RISING DAMP

Magnetic Self-Laying Dry Removable System

SUBSTRATES	ALL
MATERIALS	ALL
FORMATS	ALL
THICKNESSES	ALL
DESIGN OF LAYING	ALL

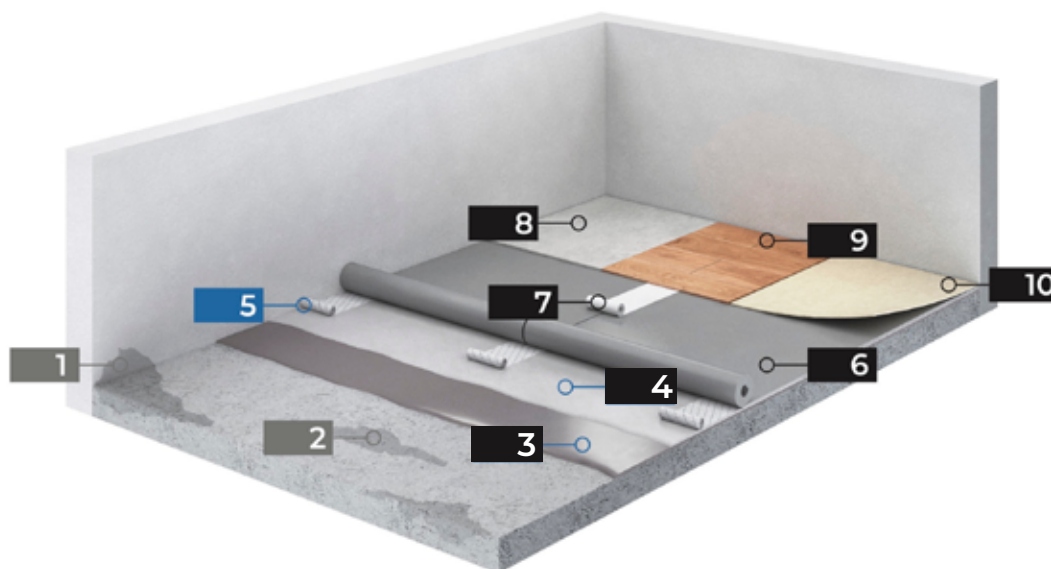

1 Concrete wall substrate with rising damp

2 Concrete substrate floor with rising damp

3 Surface regulator

4 Cementitious membrane

5 Double-sided adhesive strip
MagTaping

6 MagFlexMat - metal mat

7 PVC tape
Self-extinguishing waterproofer

8 Floor made with **MAGNETIC CERAMIC** MagFace

9 Floor made with **MAGNETIC PARQUET-WOOD** MagFace patent

10 Floor made with **LAMINATE** or magnetic LVT, MagFace patent

Note:

- If the floors, surfaces, screeds are very damaged, they must be repaired with suitable and leveled products.
- Gap and edging option: The MagFace system does not have the obligation to follow the grout, if desired, the patented system offers a line for any intended use. Consult the manual or Technical Assistance.
- Perimeter sealing option. Consult the manual or Technical Assistance

WARNING The above information and prescriptions, while corresponding to our best experience, are to be considered, in any case, purely indicative and must be confirmed by exhaustive practical applications; therefore, before using the product, whoever intends to use it is required to establish if it is suitable or not for the intended use and, in any case, assumes all responsibility that may derive from its use. Always refer to the latest updated version of the manual, technical data sheets, available on the website www.magface.it or request them by writing to info@magface.it Tutorials available on YouTube MagFace® by Bassi Group Int Stay updated FB IG YouTube LI [magfaceofficial](https://www.magfaceofficial.com)




Solution with **MagFlexMat** installation base - metal mat

NON-LEVELLED FLOOR

Magnetic Self-Laying Dry Removable System

SUBSTRATES	ALL
MATERIALS	ALL
FORMATS	ALL
THICKNESSES	ALL
DESIGN OF LAYING	ALL

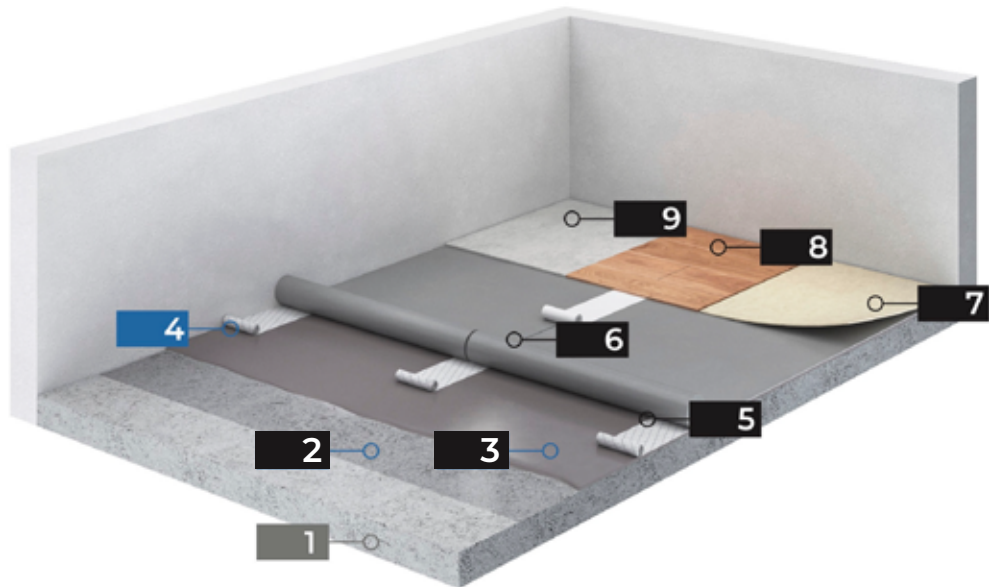

1 Substrate in concrete, gypsum fiber, plaster, plasterboard, mdf, calcium sulphate, LVT, PVC, wood, steel, resin, cork, with underfloor heating, pre-existing.

2 Adhesion promoter with very low emissions of volatile organic compounds

3 Self-leveling

4 Double-sided adhesive strip
MagTaping

5 PVC tape
Self-extinguishing waterproofer

6 **MagFlexMat - metal mat**

7 Floor made with **MAGNETIC CERAMIC**
MagFace patent

8 Floor made with **MAGNETIC PARQUET-WOOD**
MagFace patent

9 Floor made with **LAMINATE** or magnetic
LVT, MagFace patent

Note:

- If the floors, surfaces, screeds are very damaged, they must be repaired with suitable and leveled products.
- Gap and edging option: The MagFace system does not have the obligation to follow the grout, if desired, the patented system offers a line for any intended use. Consult the manual or Technical Assistance.
- Perimeter sealing option. Consult the manual or Technical Assistance

WARNING The above information and prescriptions, while corresponding to our best experience, are to be considered, in any case, purely indicative and must be confirmed by exhaustive practical applications; therefore, before using the product, whoever intends to use it is required to establish if it is suitable or not for the intended use and, in any case, assumes all responsibility that may derive from its use. Always refer to the latest updated version of the manual, technical data sheets, available on the website www.magface.it or request them by writing to info@magface.it
Tutorials available on YouTube **MagFace®** by Bassi Group Int
Stay updated FB IG YouTube LI [magfaceofficial](https://www.magface.it)